


Key:

1. Neo Rooflight fixed to structural supports **2*** at jamb using coach bolts **1b** fitted through fixing rail **1c**.
- 2***. Structural support at the jamb. 10mm clear gap between the supports.
- 3***. Low modulus neutral cure silicone sealant on top edge of roof window rollover. Apply silicone **just prior** to fitting the T-Bar.
4. Neo Rooflight T-Bar fixed to structural support **2***.
- 5***. Insulation packers fitted between the structural support **2*** and the plasterboard lining **6***.
- 6***. Plasterboard lining with plasterboard stop to protect corner. Fixed to plywood packers **3*** and fitted behind rooflight Thermoliner **1e**.
- 7***. Plaster skim.
- 8***. Timber reveal to align with rooflight linings **1d** to provide a 'frameless' internal appearance.
9. A threaded rod is then run through previously-drilled holes and T-bar and tightened with nuts and washers.

For further details please refer to the T-Bar Installation manual.

***Indicates those components NOT supplied with the rooflight and are therefore supplied by the contractor/rooflight installer.**

PLEASE NOTE: These sectional details are provided as an installation suggestion. Due to the differing nature of installations, we strongly advise you to consult your rooflight installer to verify fitness for purpose. This drawing does not constitute a structural proposal. Sufficiency of structural supports to be checked by rooflight purchasers structural consultant.

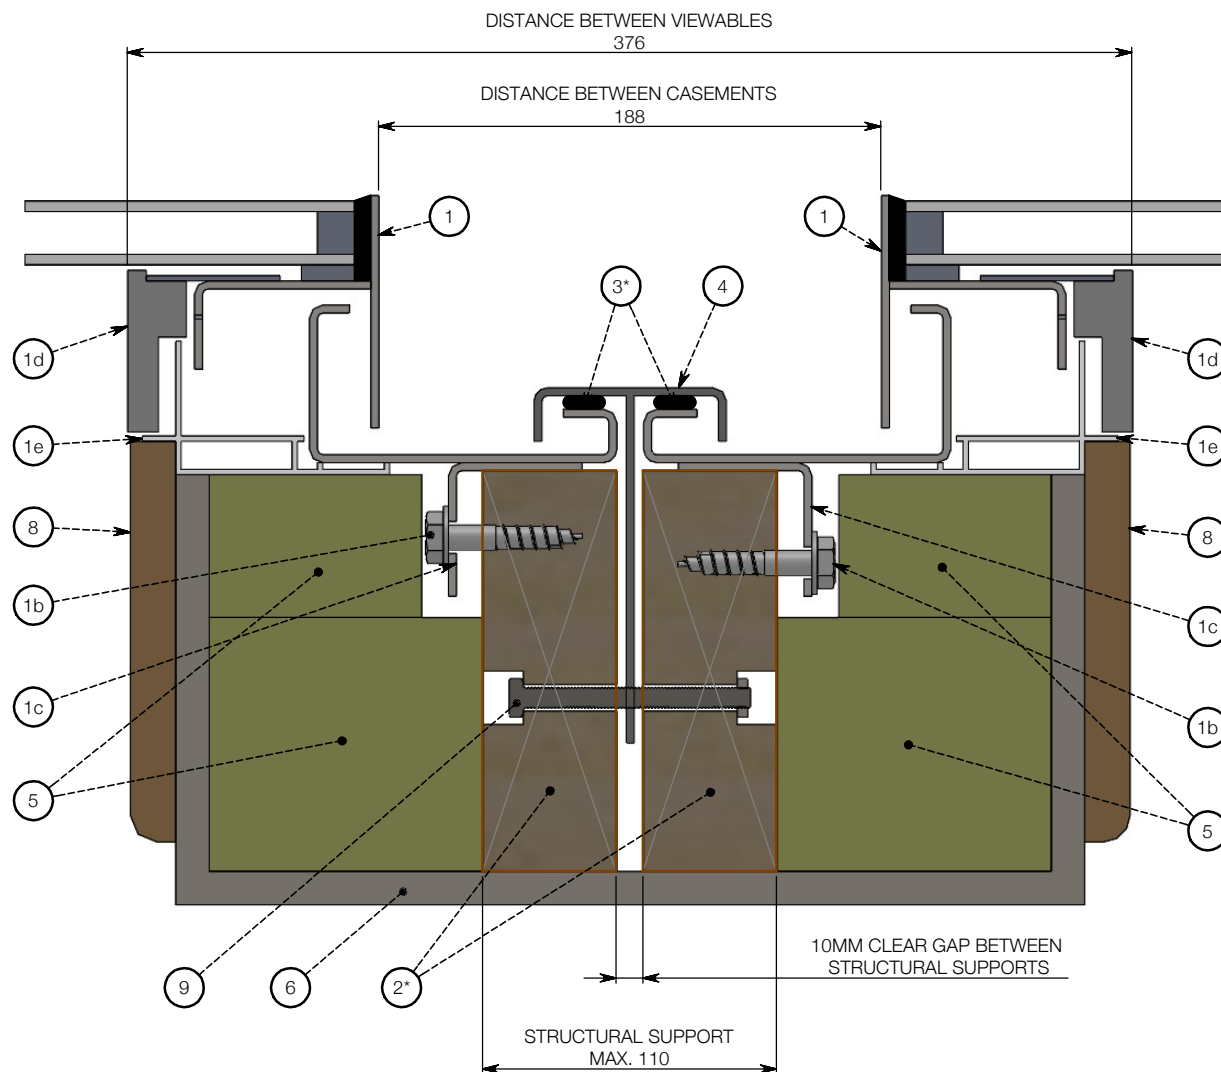

TITLE :

T-Bar Linked Neo Rooflight

> A roof window range suitable for pitched roofs between 20 ° and 60 °

T-Bar Linking Installation Detail

DWG NO. :

NS_TBAR

SHEET NO. :

1 OF 1

SCALE :

1:2 @ A3
DO NOT SCALE

DATE :

24/08/2015

This is a suggested installation detail which may not be exactly applicable to all situations and constructions. It is not a detailed or constructional proposal. Installers and designers are advised to check their own details for compliance with all currently applicable Local Authority by-laws, Acts of Parliament and British / ISO standards.

REVISION:

B

03/03/2016:
Drawing Number and
Branding Updated
DB:JL CB: KM

THE
ROOFLIGHT CO.
COTSWOLDS

w: www.therooflightco.com

t: 01993 833 108

e: hello@therooflightco.com

The Rooflight Co is a trading name of The Metal Window Company Limited - Company No. 2881879.
All information contained within this drawing is copyright © and design right of The Metal Window Company Limited.
The intellectual property rights of the products detailed within this drawing and embedded 3D models are owned by The Metal Window Company Limited.